


# Kimstarry Tech by **STREAMER**

Guiding the Way to Safety

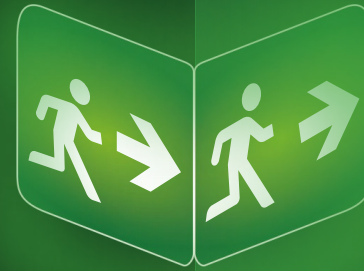

## Company Addresses & Contact (Official)

Streamer – China Headquarters Building 35, CIMC Zhigu Industrial Park  
Lilin Town, Zhongkai High-Tech Zone Huizhou, Guangdong, China

Streamer – Thailand Manufacturing Hub 211407/517 Moo 6 Mapyangphon Subdistrict Pluak Daeng District Rayong Province, 21140 Thailand

Kimstarry – Emergency Signage Division (Ningbo) No. 506, Sanbei Road Longshan Town, Cixi Zhejiang, China


Sales & Business Contact  SALES@SZSTREAMER.COM

LED  
**EMERGENCY**  
LIGHTING




**EMERGENCY  
LIGHTING**  



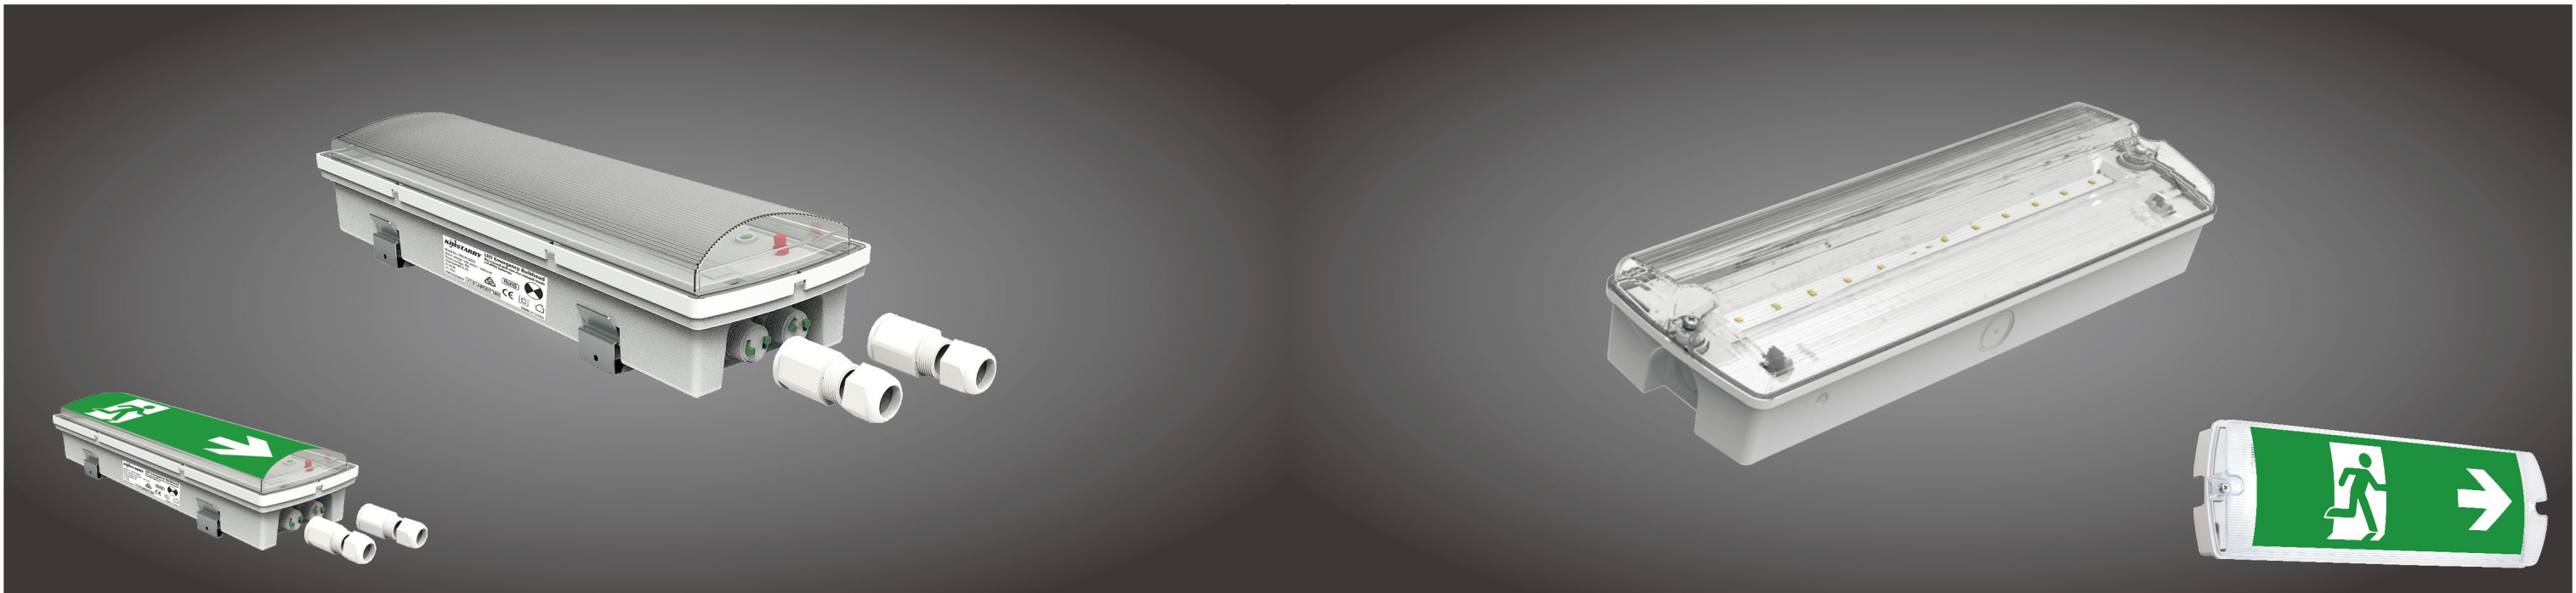

Optional interchangeable legends

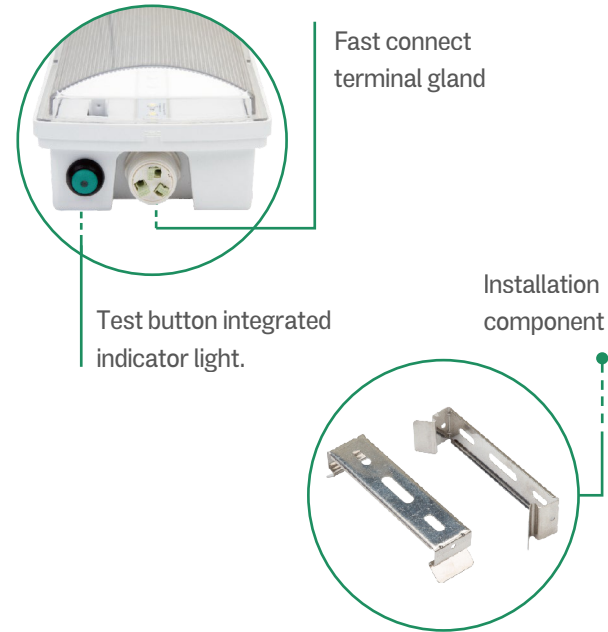


PRODUCT FEATURES

- Maintained and Non-maintained mode.
- 220-240V,50/60Hzinput.
- Manual test and Self-test function,complies with IEC62034 standard.
- Emergency lighting, complies with En60598-2-22.
- LiFePO4 Battery.
- 180 minutes duration time.
- 5 years warranty (Including batteries)

IP67 /IK08



DIMENSIONS

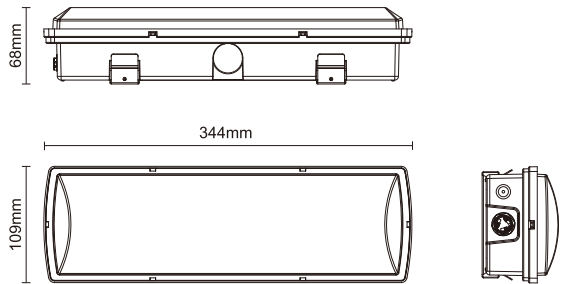

| Model No. | Rated input              | Emergency power | Test mode       | Lumen output Normal/EM mode | Battery type | Size          | Installations   |
|-----------|--------------------------|-----------------|-----------------|-----------------------------|--------------|---------------|-----------------|
| EA1-01S   | AC220-240V/50/60Hz,6Wmax | 2.5W            | Manual/selftest | 300Lm/300Lm                 | LiFePO4      | 344x109x68 mm | Ceiling mounted |
| EA1-02S   | AC220-240V/50/60Hz,6Wmax | 1.5W            | Manual/selftest | 300Lm/250Lm                 | Ni-Cd        | 344x109x68 mm | Ceiling mounted |


PRODUCT FEATURES

- Maintained and Non-maintained mode.
- 220-240V,50/60Hz input.
- Manual test and Self-test function,complies with IEC62034 standard.
- Emergency lighting, complies with EN60598-2-22.
- Ni-Cd and LiFePO4 Battery.
- 180 minutes duration time.
- 5 years warranty(Including batteries)

IP65 /IK06



DIMENSIONS

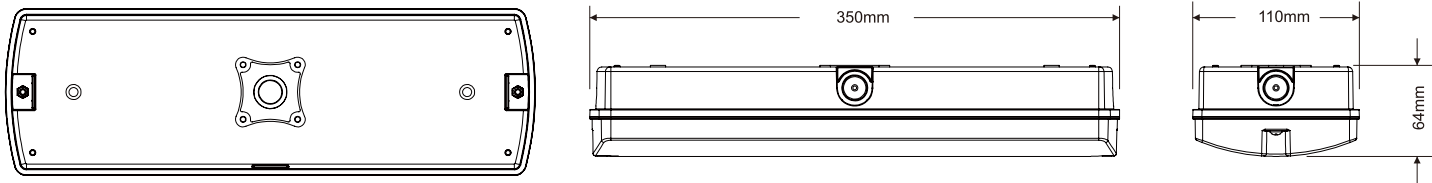

Comes with a durable, self-adhesive legend kit (synthetic paper) – mix and match as needed.


| Model No. | Rated input                | Emergency power | Test mode       | Lumen output Normal/EM mode | Battery type | Size          | Installations   |
|-----------|----------------------------|-----------------|-----------------|-----------------------------|--------------|---------------|-----------------|
| EA3-01    | AC220-240V/50/60Hz, 3W max | 0.5W            | Manual test     | 300Lm/90Lm                  | Ni-Cd        | 350x110x64 mm | Ceiling mounted |
| EA3-02    | AC220-240V/50/60Hz, 3W max | 1.2W            | Manual test     | 300Lm/150Lm                 | LiFePO4      | 350x110x64 mm | Ceiling mounted |
| EA3-02S   | AC220-240V/50/60Hz, 3W max | 1.2W            | Manual/selftest | 300Lm/150Lm                 | LiFePO4      | 350x110x64 mm | Ceiling mounted |




PRODUCT FEATURES

- Maintained and Non-maintained mode.
- Quick installation or replacement.
- 220-240V,50/60Hzinput.
- Manual test and Self-test function, complies with IEC62034standard.
- Complies with AS/NZS/EN60598-2-22,AS2293.3
- LiFePO4 Battery.
- 180 minutes duration time.
- 5 years warranty (Including batteries)

DIMENSIONS

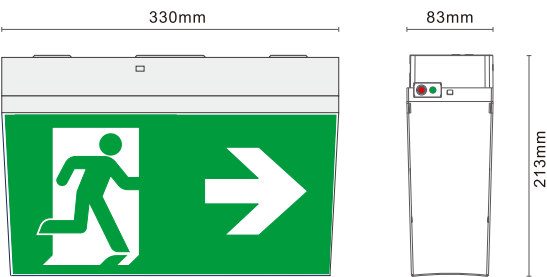

VIEWING DISTANCE

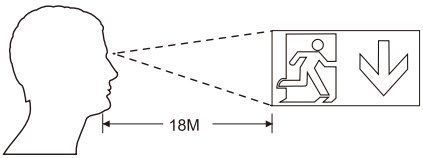


| Model No.   | Rated input                | Emergency power | Test mode       | Lumen output Normal/EM mode | Battery type | Size          | Installations                   |
|-------------|----------------------------|-----------------|-----------------|-----------------------------|--------------|---------------|---------------------------------|
| EA2-01-W/B  | AC220-240V/50/60Hz, 3W max | 1.2W            | Manual test     | 150Lm/150Lm                 | LiFePO4      | 330x83x213 mm | Ceiling Mounted<br>Wall Mounted |
| EA2-02S-W/B | AC220-240V/50/60Hz, 3W max | 1.2W            | Manual/selftest | 150Lm/150Lm                 | LiFePO4      | 330x83x213 mm | Ceiling Mounted<br>Wall Mounted |



PRODUCT FEATURES

- Maintained and Non-maintained mode.
- 6in1installation methods combined.
- 220-240V,50/60Hzinput.
- Manual test and Self-test function, complies with IEC62034 standard.
- Complies with EN60598-2-22.
- LiFePO4 Battery.
- 180 minutes duration time.
- 5 years warranty(Including batteries)

DIMENSIONS

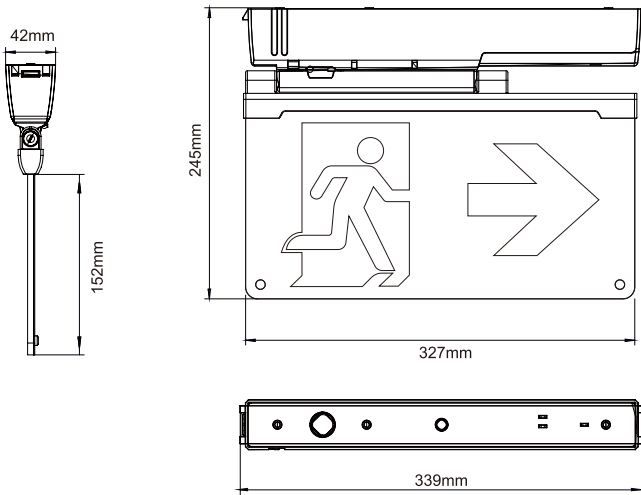

IP20 /IK06



| Product Name      | Model No.  | Picture                             | Carton size/Qty     |
|-------------------|------------|-------------------------------------|---------------------|
| Accessory for EA4 | EA4-H1-W/B | Hoisting rope for suspending        | 360x190x160mm/15pcs |
|                   | EA4-E1-W/B | Embedded parts for recessed mounted | 390x330x140mm/8pcs  |
|                   | EA4-B1-W/B | Bracket for flag mounted            | 380x150x170mm/24pcs |
|                   | EA4-T1-W/B | Track head for track Mounted        | 370x240x230mm/30pcs |

| Model No.   | Rated input                  | Emergency power | Test mode       | Lumen output Normal/EM mode | Battery type | Size           | Installations                   |
|-------------|------------------------------|-----------------|-----------------|-----------------------------|--------------|----------------|---------------------------------|
| EA4-01-W/B  | AC220-240V/50/60Hz, 3.5W max | 0.4W            | Manual test     | 110Lm/50Lm                  | LiFePO4      | 327x245x152 mm | Ceiling Mounted<br>Wall Mounted |
| EA4-02S-W/B | AC220-240V/50/60Hz, 3.5W max | 0.4W            | Manual/selftest | 110Lm/50Lm                  | LiFePO4      | 327x245x152 mm | Ceiling Mounted<br>Wall Mounted |






PRODUCT FEATURES

- Maintained and Non-maintained mode.
- 220-240V,50/60Hz input.
- Manual test and Self-test function, complies with IEC62034 standard.
- Complies with EN60598-2-22.
- LiFePO4 Battery.
- 180 minutes duration time.
- 5years warranty(Including batteries)

IP20/ IK06

CE UK EAC

DIMENSIONS

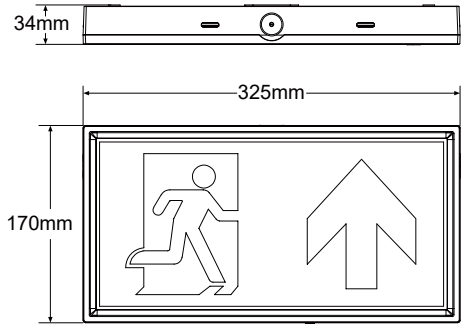

| Model No.   | Rated input                  | Emergency power | Test mode       | Lumen output Normal/EM mode | Battery type | Size         | Installations                      |
|-------------|------------------------------|-----------------|-----------------|-----------------------------|--------------|--------------|------------------------------------|
| EA5-01S-W/B | AC220-240V/50/60Hz, 3.5W max | 1.0W            | Manual/selftest | 20lm/75lm                   | LiFePO4      | 325x34x170mm | Wall mounted<br>Suspending mounted |




PRODUCT FEATURES

- Maintained and Non-maintained mode.
- Combination of 3 installation methods.
- Quick installation or replacement.
- 220-240V,50/60Hz input.
- Manual test and Self-test function, complies with IEC62034 standard.
- Complies with EN60598-2-22.
- LiFePO4 Battery.
- 180 minutes duration time.
- 5 years warranty (Including batteries)

IP20/IK08

CE UK EAC

DIMENSIONS

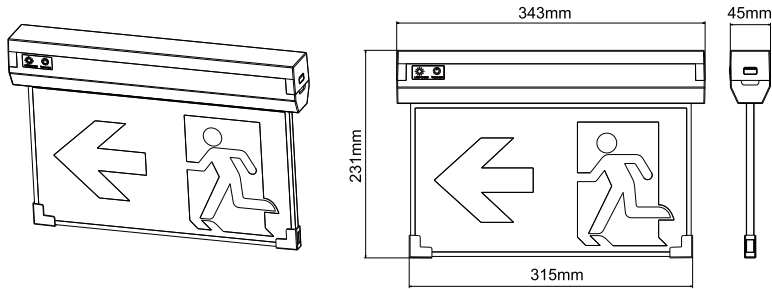


| Model No. | Rated input                  | Emergency power | Test mode       | Lumen output Normal/EM mode | Battery type | Size          | Installations                                   |
|-----------|------------------------------|-----------------|-----------------|-----------------------------|--------------|---------------|-------------------------------------------------|
| EA11-01S  | AC220-240V/50/60Hz, 3.0W max | 1.0W            | Manual/selftest | 120lm/120lm                 | LiFePO4      | 343x231x45 mm | Ceiling Mounted<br>Wall Mounted<br>Flag Mounted |



PRODUCT FEATURES

- Non-maintained mode.
- 220-240V,50/60Hz input.
- Manual test and Self-test function, complies with IEC62034 standard.
- Complies with EN60598-2-22.
- LiFePO4 Battery.
- 180 minutes duration time.
- 5 years warranty(Including batteries)


DIMENSIONS

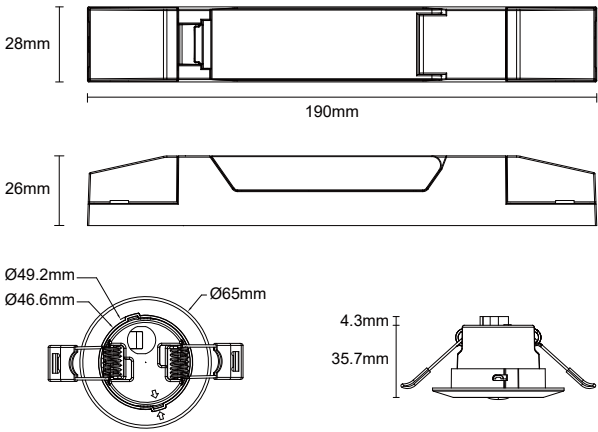

IP20

CEUKCAEAC


| Model No.    | Rated input                   | Emergency power | Test mode       | Lumen output Normal/EM mode | Battery type | Size           | Installations    |
|--------------|-------------------------------|-----------------|-----------------|-----------------------------|--------------|----------------|------------------|
| EA16-01S-W/B | AC220-240V /50/60Hz, 3.0W max | 1W              | Manual/selftest | 12Lm                        | LiFePO4      | 190x 28x 26 mm | Recessed mounted |

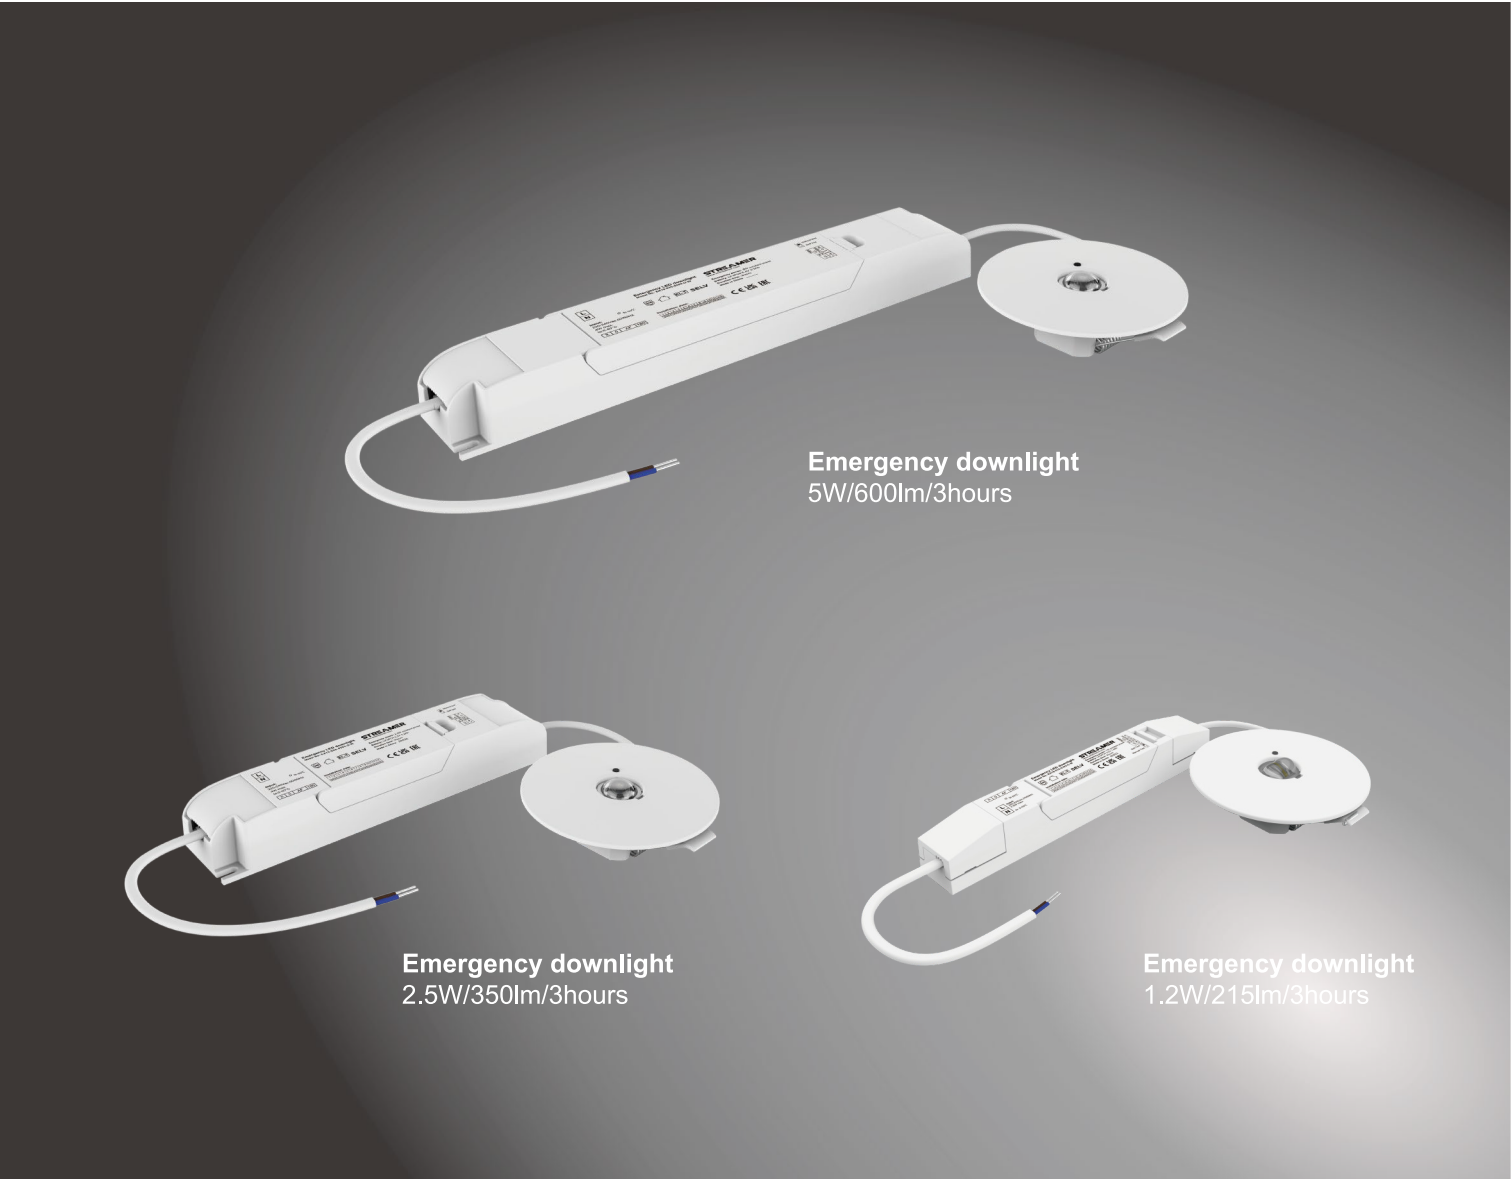

PRODUCT FEATURES

- Non-maintained mode.
- 220-240V,50/60Hz input.
- Manual test and Self-test function, complies with IEC62034 standard.
- Complies with EN60598-2-22.
- LiFePO4 Battery.
- 180 minutes duration time.
- 5 years warranty(Including batteries)

DIMENSIONS

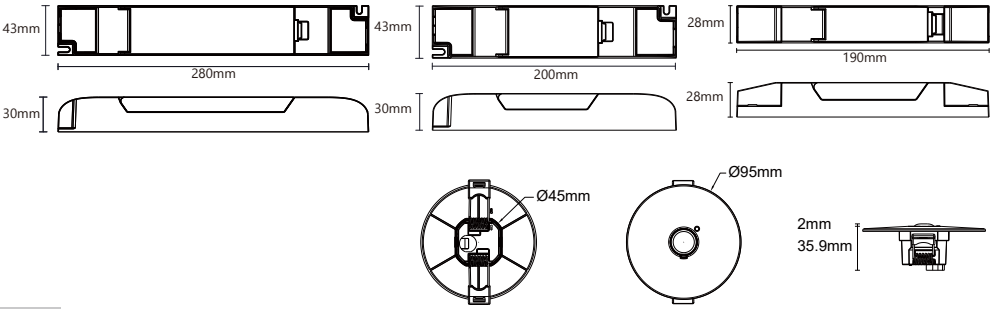

IP20 /IK 10

CEUKCAEAC

| Model No.    | Rated input                  | Emergency power | Test mode       | Lumen output Normal/EM mode | Battery type | Size         | Installations                        |
|--------------|------------------------------|-----------------|-----------------|-----------------------------|--------------|--------------|--------------------------------------|
| EA19-01S-W/B | AC220-240V/50/60Hz, 3.5W max | 1W              | Manual/selftest | 215Lm                       | LiFePO4      | 190x28x26mm  | Recessed mounted<br>Ceiling mounted  |
| EA19-02S-W/B | AC220-240V/50/60Hz, 4W max   | 1W              | Manual/selftest | 215Lm                       | LiFePO4      | 200x43x30mm  | Recessed mounted<br>Ceiling mounted  |
| EA19-03S-W/B | AC220-240V/50/60Hz, 4W max   | 1W              | Manual/selftest | 215Lm                       | LiFePO4      | 280x43x30mm  | Recessed mounted<br>Ceiling mounted  |
| EA19-C1-W/B  | Accessory-Ceiling Box        |                 |                 |                             |              | 200x200x54mm | Recessed mounted<br>Ceiling mounting |






PRODUCT FEATURES

- Non-maintained mode.
- Ceiling and Recessed Mounting.
- 220-240V,50/60Hz input.
- Manual test and Self-test function, complies with IEC62034 standard.
- Complies with EN60598-2-22.
- LiFePO4 Battery.
- 180 minutes duration time.
- 5 years warranty(Including batteries)

DIMENSIONS

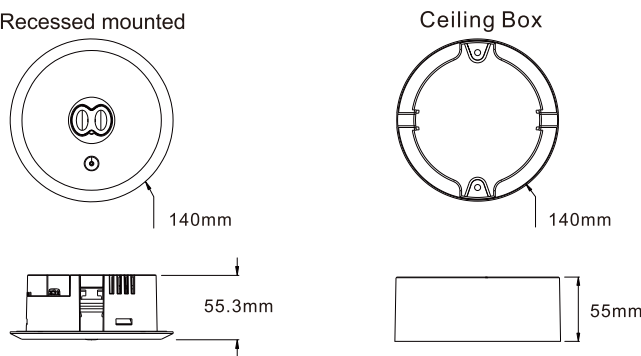

IP20 /IK06




| Model No.   | Rated input                  | Emergency power | Test mode       | Lumen output Normal/EM mode | Battery type | Size            | Installations     |
|-------------|------------------------------|-----------------|-----------------|-----------------------------|--------------|-----------------|-------------------|
| EA8-01-W/B  | AC220-240V/50/60Hz, 3.0W max | 2.0W            | Manual test     | 270Lm(E.M)                  | LiFePO4      | 140x140x55.3 mm | Recessed Mounting |
| EA8-02S-W/B | AC220-240V/50/60Hz, 3.0W max | 2.0W            | Manual/selftest | 270Lm(E.M)                  | LiFePO4      | 140x140x55.3 mm | Recessed Mounting |
| EA8-C1-W/B  | Accessory-Ceiling Box        |                 |                 |                             |              | 140x140x55 mm   | Ceiling Mounting  |



PRODUCT FEATURES

- Non-maintained mode.
- Ceiling and Recessed Mounting.
- 220-240V,50/60Hz input.
- Manual test and Self-test function, complies with IEC62034 standard.
- Complies with EN60598-2-22.
- LiFePO4 Battery.
- 180 minutes duration time.
- 5 years warranty(Including batteries)

DIMENSIONS

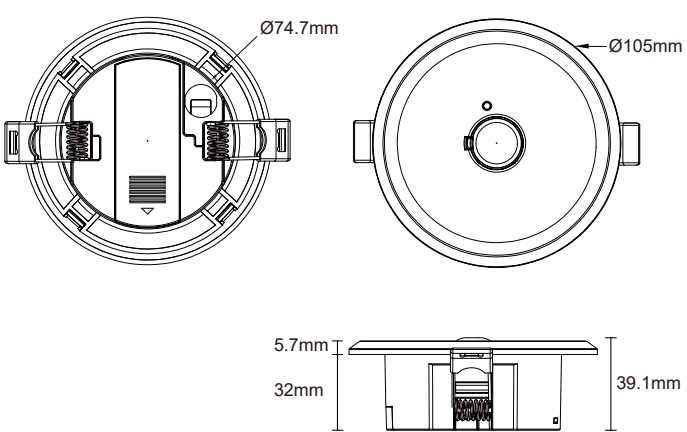

IP20 /IK06



| Model No.    | Rated input                  | Emergency power | Test mode       | Lumen output Normal/EM mode | Battery type | Size            | Installations     |
|--------------|------------------------------|-----------------|-----------------|-----------------------------|--------------|-----------------|-------------------|
| EA15-01S-W/B | AC220-240V/50/60Hz, 2.0W max | 1.2W            | Manual/selftest | 215Lm(E.M)                  | LiFePO4      | 105x105x39.1mm  | Recessed Mounting |
| EA15-C1-W/B  | Accessory-Ceiling Box        |                 |                 |                             |              | 98.3x98.3x42 mm | Ceiling Mounting  |



PRODUCT FEATURES


- Non-maintained mode.
- Track Mounting.
- 220-240V,50/60Hz input.
- Manual test and Self-test function, complies with IEC62034 standard.
- Complies with EN60598-2-22.
- LiFePO4 Battery.
- 180 minutes duration time.
- 5 years warranty(Including batteries)

IP20 /IK06

CE UK EAC

| Model No.   | Rated input                  | Emergency power | Test mode       | Lumen output Normal/EM mode | Battery type | Size        | Installations  |
|-------------|------------------------------|-----------------|-----------------|-----------------------------|--------------|-------------|----------------|
| EA12-01-WB  | AC220-240V/50/60Hz, 3.0W max | 2.0W            | Manual test     | 270Lm(E.M)                  | LiFePO4      | 229x68x95mm | Track Mounting |
| EA12-02S-WB | AC220-240V/50/60Hz, 3.0W max | 2.0W            | Manual/selftest | 270Lm(E.M)                  | LiFePO4      | 229x68x95mm | Track Mounting |

DIMENSIONS

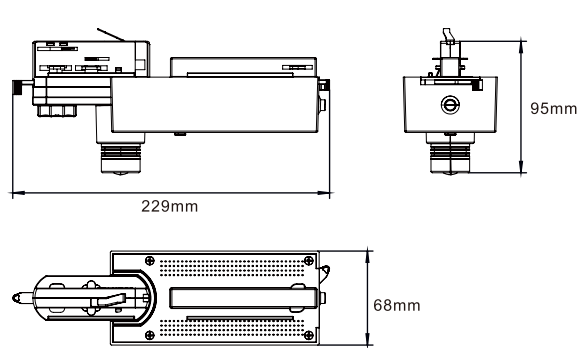

PRODUCT FEATURES


- Non-maintained mode.
- Wall Mounting
- 220-240V,50/60Hz input.
- Manual test and Self-test function, complies with IEC62034 standard.
- Complies with EN60598-2-22.
- LiFePO4 Battery.
- 180 minutes duration time.
- 5 years warranty(Including batteries)

IP65 /IK08

CE UK EAC

| Model No.    | Rated input                  | Emergency power | Test mode       | Lumen output Normal/EM mode | Battery type | Size         | Installations |
|--------------|------------------------------|-----------------|-----------------|-----------------------------|--------------|--------------|---------------|
| EA14-01S-W/B | AC220-240V/50/60Hz, 3.5W max | 4W              | Manual/selftest | 600Lm(E.M)                  | LiFePO4      | 240x245x60mm | Wall Mounting |

DIMENSIONS

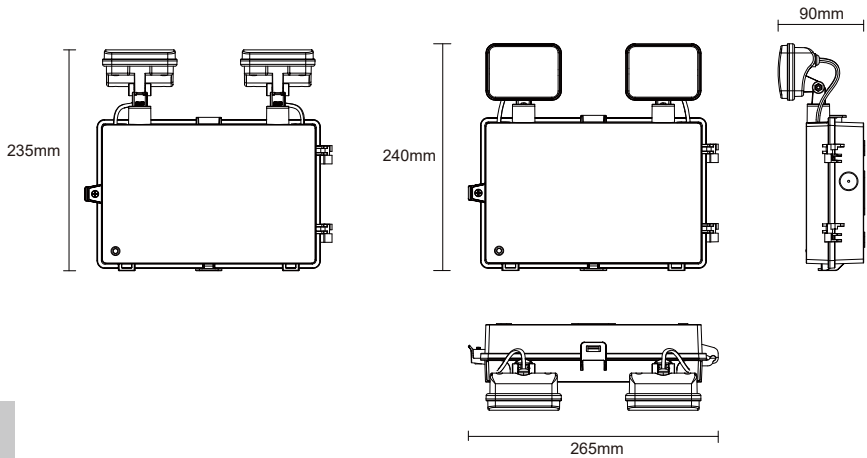



# Kimstarry Tech by **STREAMER**

Please consult our specification sheet and installation  
guide for further information

