

EA15 Integrated Downlight



PRODUCT FEATURES

- Open area and corridor lens optional
- Manual test and self-test selectable by dip switch
- LiFePO₄ battery easy to replace



ORDERING INFORMATION

SAMPLE NUMBER:EA15-01S-0103-O-W


Series	Generation	Category	EM power	Duration	Lens	Color	Catalog
EA15=EU&Australia emergency light # 15 series	01=Gen1	Manual test S=Self test	1W	3h	O=Open area C=Corridor	W=White B=Black	EA15-01-W EA15-01-B EA15-01S-W EA15-01S-B

GENERAL INFORMATION

Light Source LED	Colour/Finish White/Black
Certificate CE UKCA	Warranty (include battery) 5 years
IP grade IP20	Installation Recessed mounted Ceiling mounted

DIMENSION

Lamp:Ø105*39.1

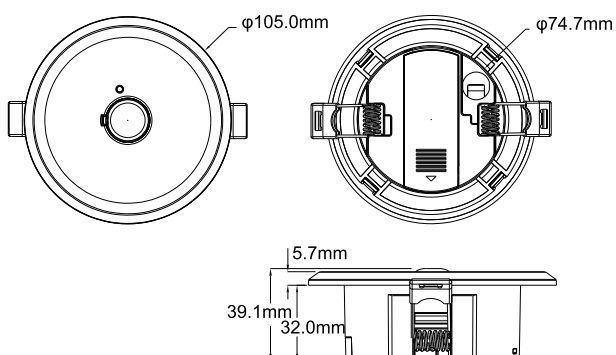


TECHNICAL INFORMATION

Input 220-240V	Beam Angle 155/110	CRI 80
CCT 6000K	SDCM 6	Lumen 215
Operating Temp 0-40°C	Emergency Output Duration >180minutes	

PHOTOMETRY

Open area lens



Corridor lens

