

EA16 Separated mini Downlight



PRODUCT FEATURES

- Open area and corridor lens optional
- Manual test and self-test selectable by dip switch
- LiFePO₄ battery easy to replace



ORDERING INFORMATION

SAMPLE NUMBER: EA16-01S-0103-O-W

Series	Generation	Category	EM power	Duration	Lens	Color	Catalog
EA1 =EU&Australia emergency light # 16 series	01 =Gen1	Manual test S=Self test	1W	3h	O =Open area C =Corridor	W =White B =Black	EA16-01-0103-O-W EA16-01-0103-C-W EA16-01-0103-O-B EA16-01-0103-C-B EA16-01S-0103-O-W EA16-01S-0103-C-W EA16-01S-0103-O-B EA16-01S-0103-C-B

GENERAL INFORMATION

Light Source
LED

Colour/Finish
White/Black

Certificate
CE UKCA

Warranty (include battery)
5 years

IP grade
IP20

Installation
Recessed mounted

TECHNICAL INFORMATION

Input
220-240V

Beam Angle
135/140

CRI
80

CCT
6000K


SDCM
6

Lumen
120

Operating Temp
0-45°C

Emergency Output Duration
>180 minutes

DIMENSION(mm) Lamp:Ø65*40 Driver:190*28*26

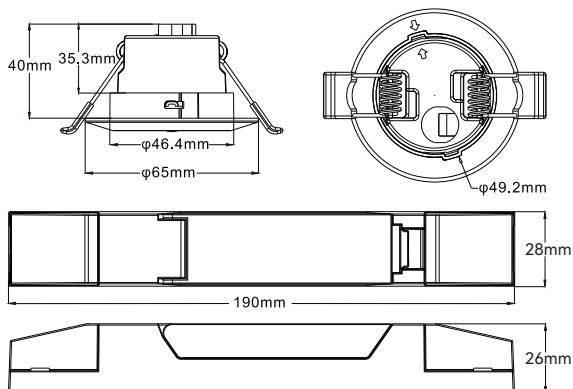

PHOTOMETRY

Open area lens

Corridor lens

