

EA16 Separated mini downlight

STREAMER



PRODUCT FEATURES

- Open area and corridor lens optional
- Manual test and self-test selectable by dip switch
- LiFePO4 battery easy to replace



ORDERING INFORMATION

SAMPLE NUMBER: EA16-01S-0103-O-W

Series	Generation	Category	EM power	Duration	Lens	Color	Catalog
EA16 =EU&Australia emergency light # 16 series	01=Gen1	Manual test S=Self test	1W	3h	O=Open area C=Corridor	W=White B=Black	EA16-01-0103-O-W EA16-01-0103-C-W EA16-01-0103-O-B EA16-01-0103-C-B EA16-01S-0103-O-W EA16-01S-0103-C-W EA16-01S-0103-O-B EA16-01S-0103-C-B


GENERAL INFORMATION

TECHNICAL INFORMATION

Light Source LED	Colour/Finish White/Black	Input 220-240V	Beam Angle 135/140	CRI 80
Certificate CE UKCA	Warranty (include battery) 5 years	CCT 6000K	SDCM 6	Lumen 120
IP grade IP20	Installation Recessed mounted	Operating Temp 0-45°C	Emergency Output Duration >180 minutes	

DIMENSION(mm)

Lamp:Ø65*40 Driver:190*28*26

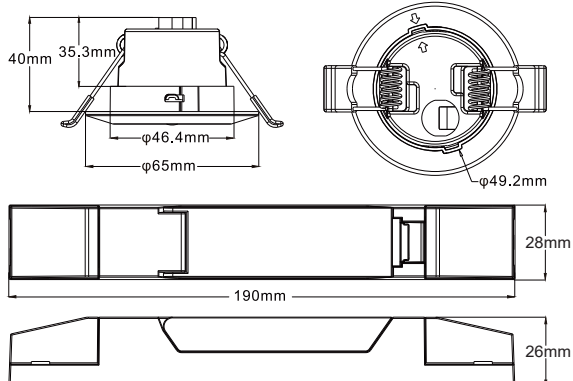

PHOTOMETRY

Open area lens

Corridor lens

